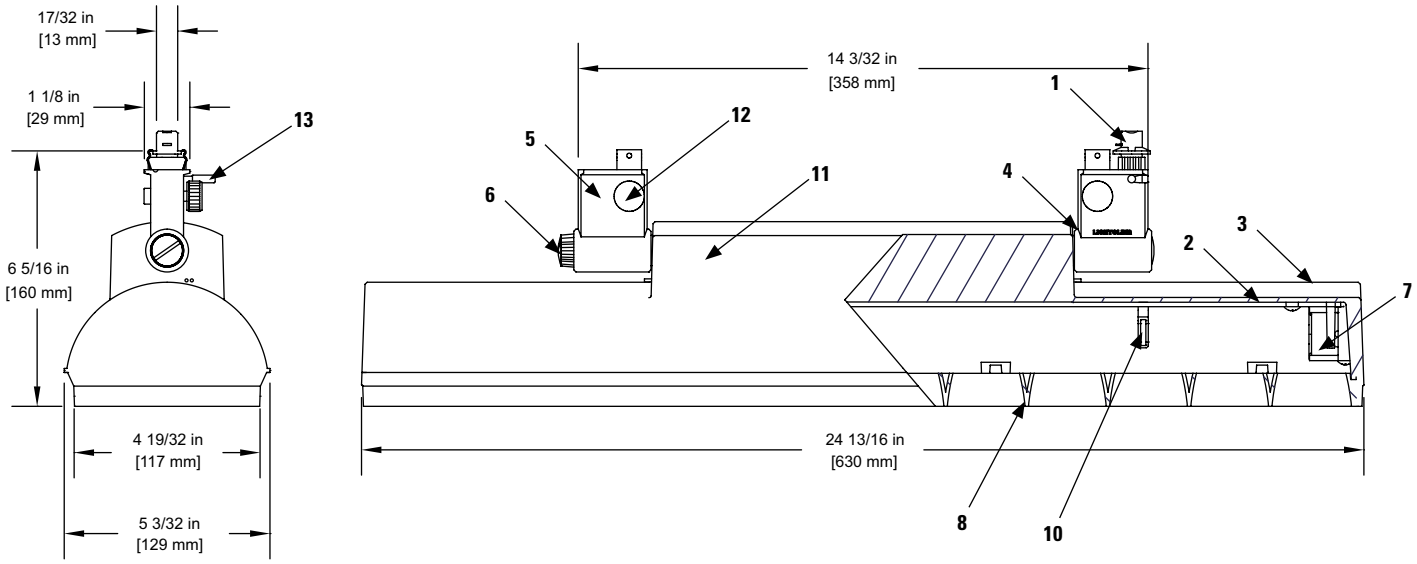

Cat. No.	Finish	Mounting	Ballast	Input Watts	Amps	Lamp
37240WH **37240BK**	Matte White/Metalized Louver Matte Black/Metalized Louver	ProSpec 277V Track System Only.	Electronic	67W	.27AMP	FT 40W/2G11

Features

1. **Attachment Fitting:** Molded polycarbonate, pin rotates fitting to engage into track to energize fixture.
2. **Reflector:** Specular Plus® finish.*
3. **Body Housing:** One-piece die-cast aluminum.
4. **Pivot Tension Mount:** 0° - 90° Vertical rotation from NADIR in both directions; (0° - 78° from NADIR when used with Recessed Track).
5. **(2) Track Adaptor Housing:** Die-cast aluminum.
6. **Aiming Lock:** Locks vertical position at the desired aiming angle.
7. **Lamp Socket:** High temperature thermoplastic.
8. **Louver with Parabolic Blades:** Snaps inside fixtures body. Molded ABS, semi-specular finish or integral white blades.
9. **Lamp Support Clip (2):** High temperature thermoplastic.
10. **(2) 40W Twin Tube:** Compact fluorescent lamp (by others).
11. **Ballast:** Electronic.
12. **Locking Knob:** Mechanically locks fixture to the track, independently from the electrical connection.
13. **Lever:** Energizes fixture.

Electrical

Electronic Ballast Instant Start

Input Voltage: 277V
Power Factor: >0.95
Input Power: 67W (2 lamps)
Max Input Current: 0.27A @ 277V
Ballast Factor: 0.88
Total Harmonic Distortion: <20%
Crest Factor: <1.7
Do Not Use On Dimming Circuit

Finish

All painted finishes are baked enamel.

Labels

UL, I.B.E.W.

* Specular Plus® is a registered trademark of MSC Laminates & Composites Inc.
Advent® is a registered trademark of Lightolier.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1108

Lighting Data

FOOTCANDLES ON WALL:

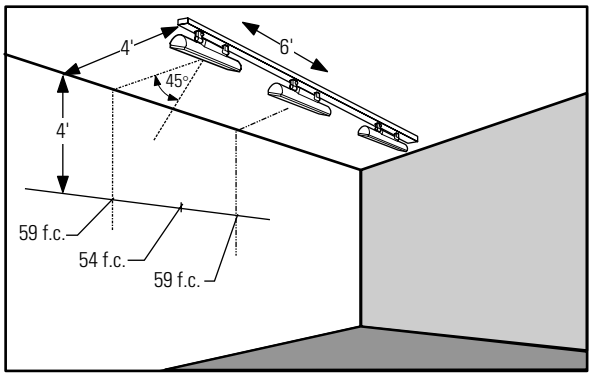

EXAMPLE: With track located 4' from wall and multiple units spaced 6' on center and aimed 45° from horizontal, the illumination on wall 4' from ceiling will be 59 f.c. beneath units and 54 f.c. between units.

Footcandles on Wall

Track 3 Feet From Wall

Distance From Ceiling in Feet	Single Unit 0'	1'	2'	3'	4'	5'	Multiple Units 3'			4'			5'		
1'	141	110	57	22	6	1	181	165	181	149	109	149	139	68	139
2'	127	108	71	39	19	9	217	211	217	171	111	171	151	113	151
3'	76	68	50	31	10	10	150	150	150	117	111	171	99	86	99
4'	45	42	34	24	15	9	106	105	106	81	80	81	66	63	66
5'	29	27	23	17	12	8	74	74	74	56	56	56	45	43	45
6'	19	19	16	13	10	7	58	59	58	45	45	45	37	37	37
7'	13	13	11	10	8	6	43	43	43	34	34	34	28	28	28
8'	9	9	8	7	6	5	32	33	32	26	26	26	21	21	21
9'	7	7	6	6	5	4	27	27	27	22	22	22	18	18	18

Track 4 Feet From Wall

Distance From Ceiling in Feet	Single Unit 0'	1'	2'	3'	4'	5'	Multiple Units 4'			5'			6'		
1'	80	69	47	27	14	7	112	103	112	97	76	97	90	57	90
2'	77	68	49	30	17	8	110	104	110	91	79	91	82	59	82
3'	61	56	44	31	20	11	103	100	103	84	78	84	73	61	73
4'	42	39	33	25	18	12	83	83	83	68	66	68	59	54	59
5'	28	27	23	19	14	10	63	62	63	51	50	51	43	42	43
6'	21	20	18	15	12	9	50	51	50	41	41	41	35	34	35
7'	15	14	13	11	9	7	40	40	40	32	33	32	27	27	27
8'	11	11	10	9	8	6	34	35	34	28	29	28	24	24	24
9'	9	9	8	7	6	5	29	29	29	24	24	24	20	21	20

Footcandles are average and rounded off and are based on a minimum of five units.

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A1108